

PW1515-205


GNSS L1/E1 LNA

Features

- ✓ Same active circuitry as PW1515-004
- ✓ Radiation tolerant
- ✓ Wide operating temperature range

Benefits

- ✓ Commercial off-the-shelf (COTS)
- ✓ Facilitates Hardware-In-The-Loop (HITL) tests
- ✓ Facilitates irradiation tests
- ✓ Consultation services available (link budget, architecture and system design)

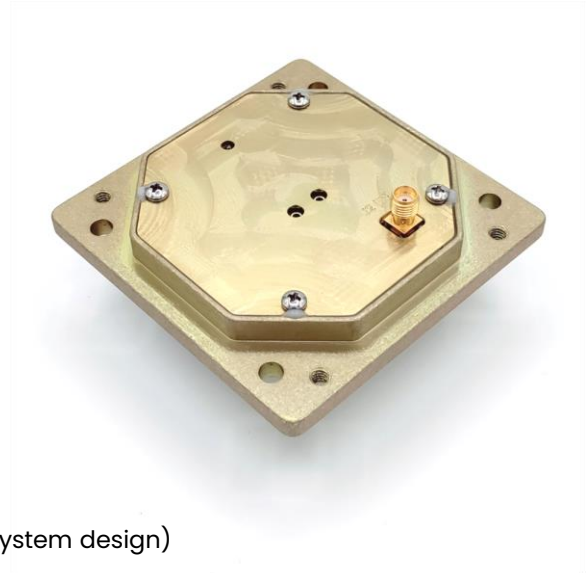

Product Overview

PW1515-205 is the LNA-only version of the PW1515-004 antenna. It shares identical features and design with PW1515-004 in every aspect, except for the absence of the radiating element. Instead, the input of the LNA section is connectorized.

This configuration facilitates connectorized tests, including Hardware-In-The-Loop test (HITL), irradiation test, noise figure and active gain test and verification, and more.

Related Products

Part Number	Description
PW1515-004	Active GNSS L1/E1 Antenna
PW1515-304	GNSS L1/E1 Test Hat
PW2020-000	Active S-Band RHCP RX Omni Antenna
PW2020-300	S-Band RHCP RX Omni Test Hat
PW2222-110	S-Band Dual-CP TX Omni Antenna

Information furnished by PlaneWave, Inc. is believed to be accurate and reliable. However, no responsibility is assumed by PlaneWave for its use, nor for any infringements of patents or other rights of third parties that may result from its use.

Electrical Specifications

Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	1559		1591	MHz
VSWR			2:1	
Gain (Notes 1 and 2)	12	15	18	dB
Noise Figure (Note 2)		2.5	3.5	dB
Rejection @ 1650 MHz	50			dBc
Voltage	4.5	5	12	V
Current		25	30	mA

Note 1: LNA gain is customizable upon request

Note 2: Measured over the full operating temperature range


Mechanical Specifications

Parameter / Condition	Value	Unit	Limits
Connector	SMA Female		
Mass	225	g	Max
Compatible Antenna	PW1515-004		




Environmental Specifications

Parameter / Condition	Min	Typ	Max	Unit
Operating Temperature	-70		100	°C
Storage Temperature	-70		100	°C
Radiation Hardness (TID)	3			Mrad
Destructive Single Event Effects (Note 1)	37			MeV-cm ² /mg
Vibration	14.1			G _{RMS}


Random Vibration Test Levels
(GSFC-STD-7000)

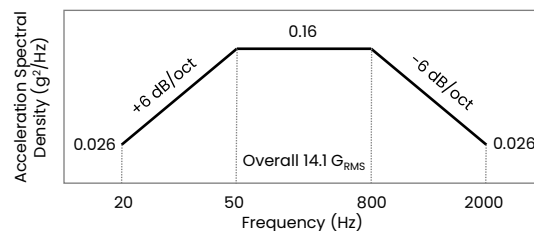

Note 1: No destructive SEE was observed when tested with heavy ions up to the above LET

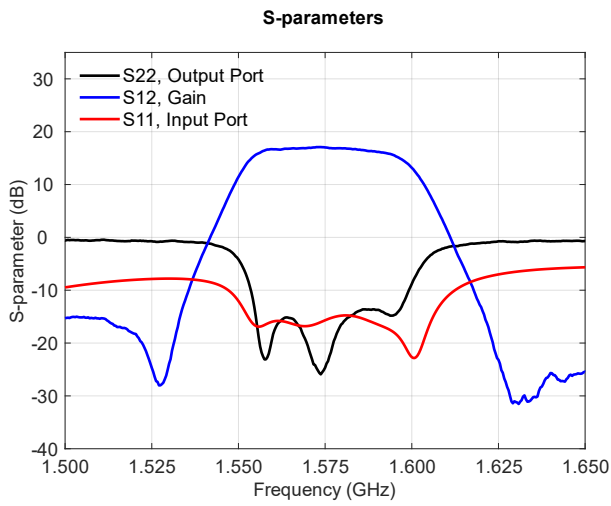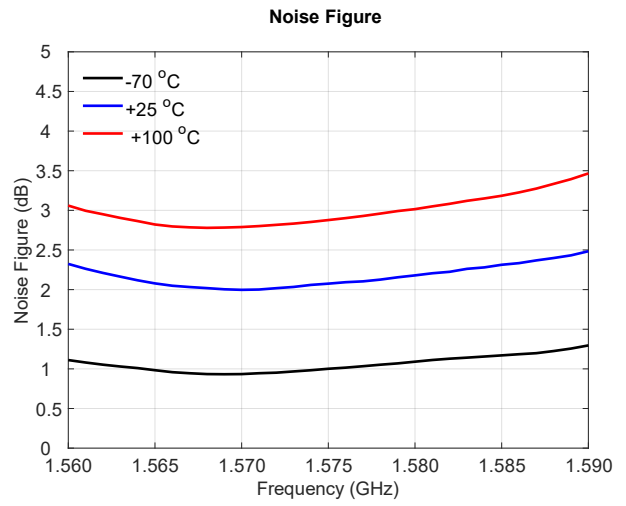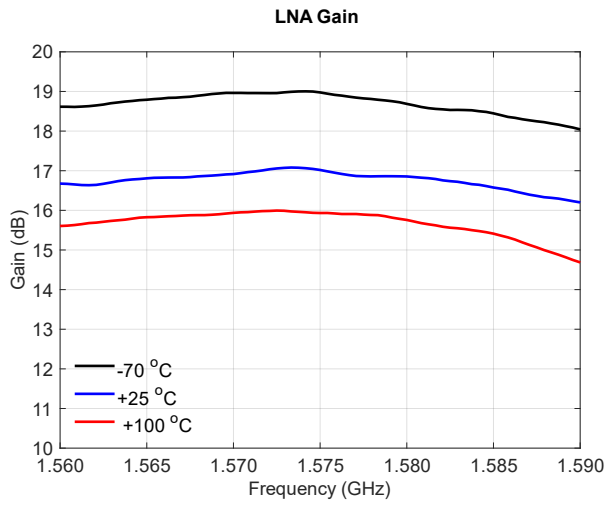

Mechanical Outline

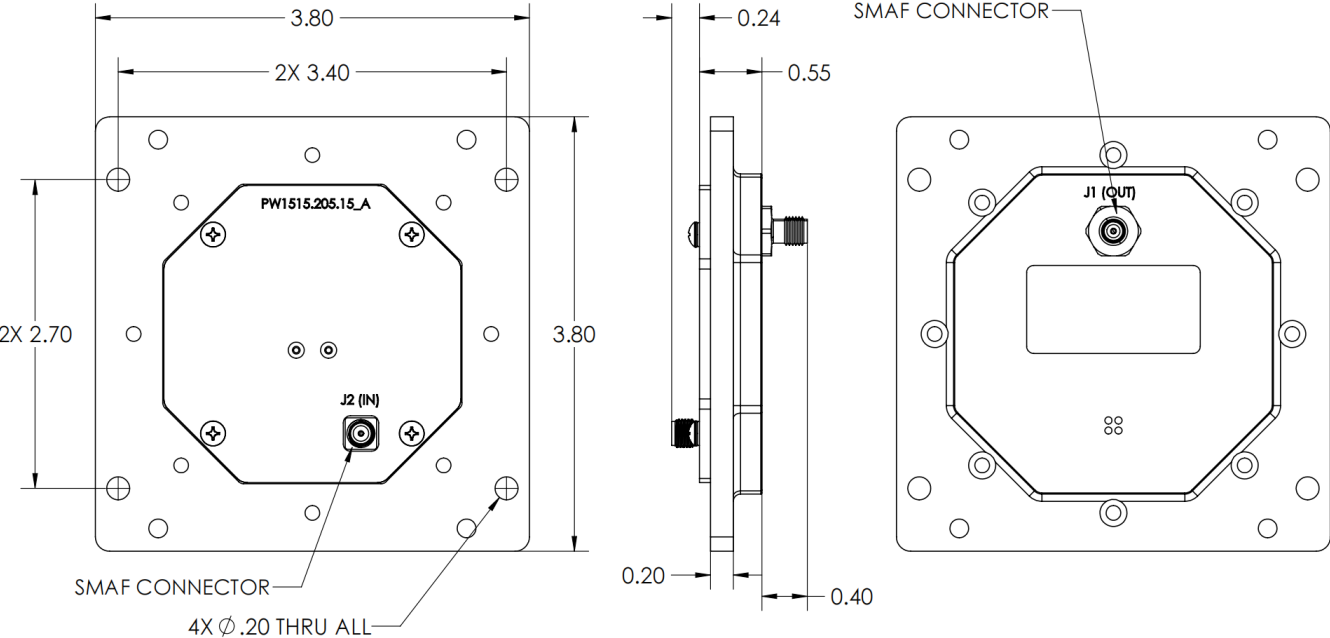

Dimensions shown in inches.
Tolerances - Two Place Decimal: ±0.010, Three Place Decimal: ±0.005

Contact PlaneWave, Inc.

6925 Canby Ave, Ste 110
Reseda, CA 91335

www.planewaveinc.com
sales@planewaveinc.com