

## PW2222-110


## S-Band Dual-CP TX Omni Antenna

### Features

- ✓ Size < 1U
- ✓ Dual circular polarization: RHCP, LHCP or both
- ✓ Omni-directional pattern
- ✓ Wide operating temperature range
- ✓ Designed to NASA GEVS (GSFC-STD-7000)
- ✓ TRL 9

### Benefits

- ✓ Commercial off-the-shelf (COTS)
- ✓ Acceptance Tests available
- ✓ Compatible Test Hat available
- ✓ Qualified for space applications
- ✓ True circular polarization with extremely low Axial Ratio over the entire frequency band
- ✓ Consultation services available (link budget, architecture and system design)

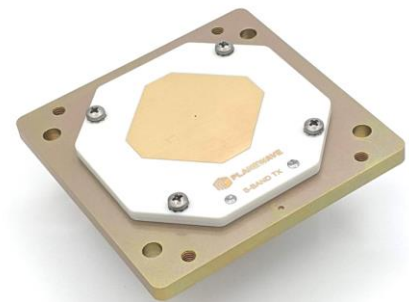

### Product Overview

PW2222-110 is a high-performance downlink antenna designed for TT&C applications in harsh space environments. It features excellent axial ratio over the entire frequency band, making it ideal for demanding and reliable space communication links.

This antenna is a perfect choice for a variety of space applications, including LEO, MEO and GEO. The S-Band TT&C Antenna is lightweight and easy to integrate. It is also available with Test Hats to facilitate testing and integration.

### Related Products

Part Number	Description
PW2222-310	S-Band Dual-CP TX Omni Test Hat
PW2222-100	S-Band RHCP TX Omni Antenna
PW2222-101	S-Band RHCP TX 2x2 Antenna
PW2020-000	Active S-Band RHCP RX Omni Antenna
PW2020-110	S-Band Dual-CP RX Omni Antenna
PW1515-001	Active GPS L1 Antenna

Information furnished by PlaneWave, Inc. is believed to be accurate and reliable. However, no responsibility is assumed by PlaneWave for its use, nor for any infringements of patents or other rights of third parties that may result from its use.

### Electrical Specifications

Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	2200		2290	MHz
Polarization		RHCP/LHCP		
Axial Ratio		2	3	dB
VSWR			2:1	
Gain	4	4.5	5	dBic
Pattern Coverage		Omni		
Power Handling	20			W


### Mechanical Specifications







Parameter / Condition	Value	Unit	Limits
Connector	SMA Female		
Mass	100	g	Max
Compatible Test Hat	PW2222-310		

### Environmental Specifications


Parameter / Condition	Min	Typ	Max	Unit
Operating Temperature	-70		100	°C
Storage Temperature	-70		100	°C
Vibration	14.1			G <sub>RMS</sub>

Random Vibration Test Levels  
(GSFC-STD-7000)

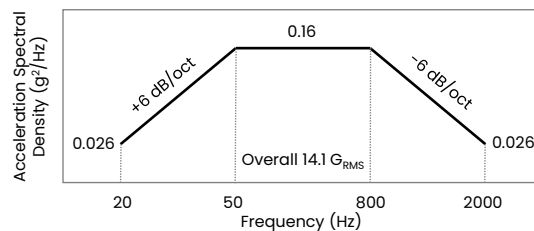

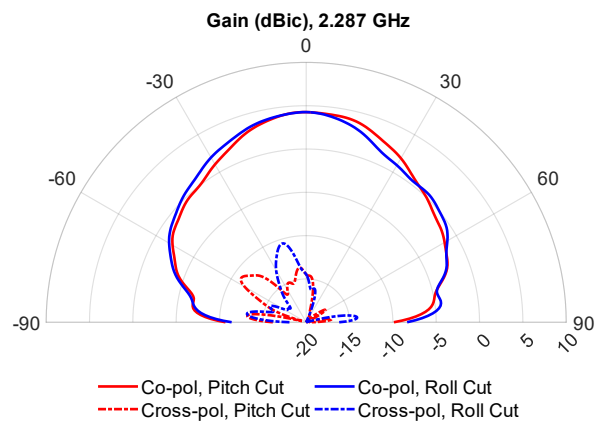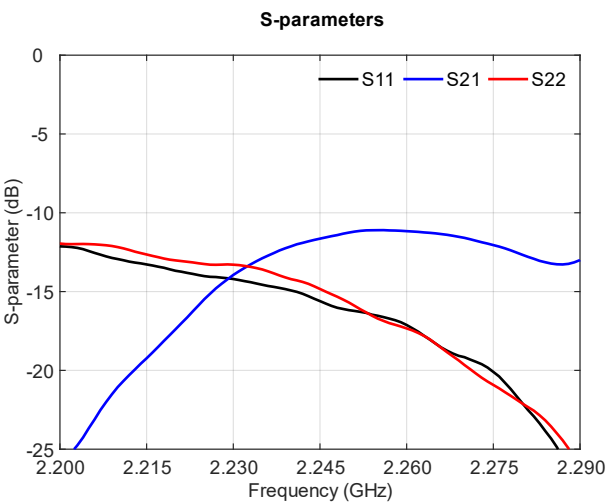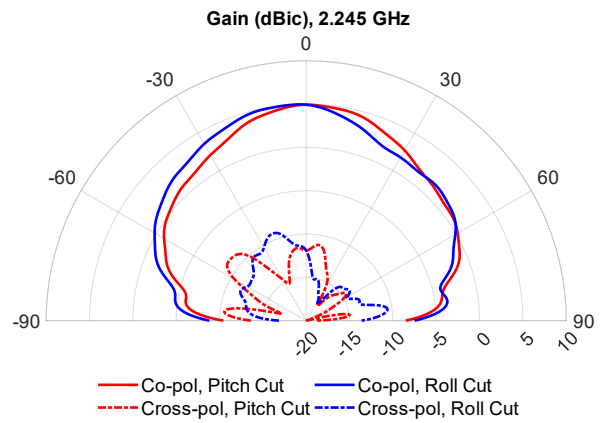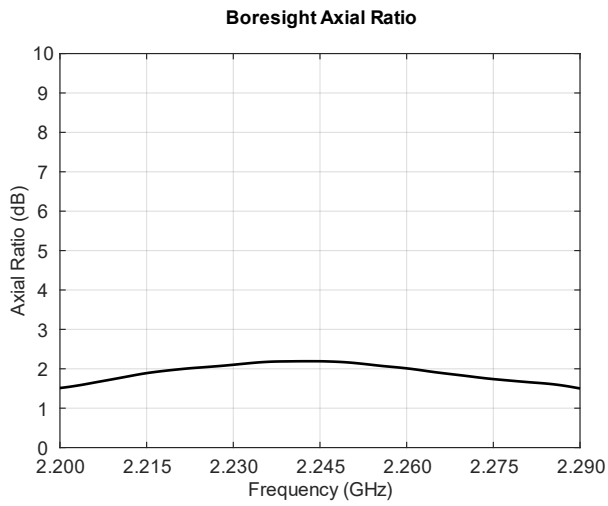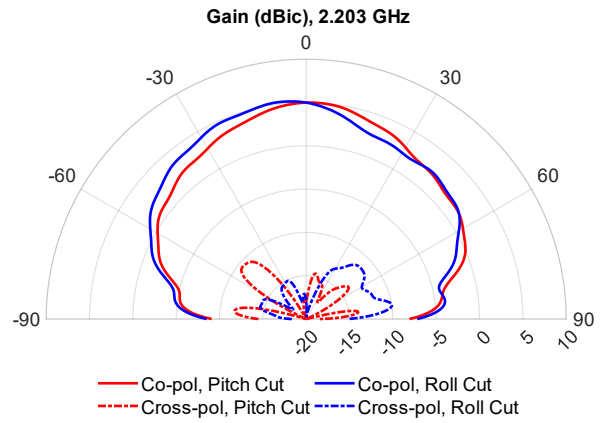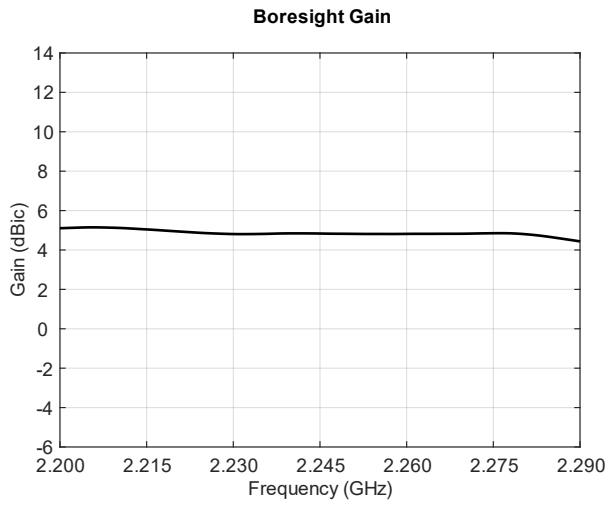

**Mechanical Outline**

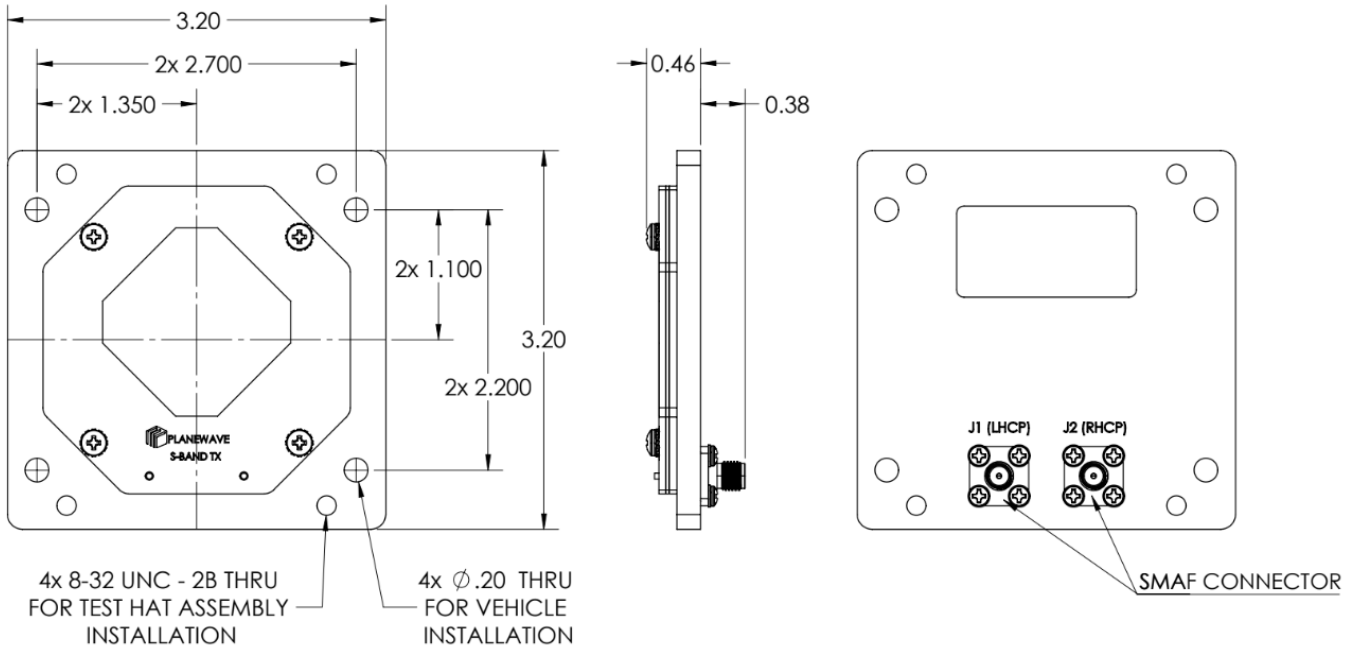

**Dimensions shown in inches.**

Tolerances - Two Place Decimal:  $\pm 0.010$ , Three Place Decimal:  $\pm 0.005$

**Contact PlaneWave, Inc.**

6925 Canby Ave, Ste 110  
Reseda, CA 91335

[www.planewaveinc.com](http://www.planewaveinc.com)  
[sales@planewaveinc.com](mailto:sales@planewaveinc.com)