

PW8282-101


X-Band RHCP TX 2x2 Antenna

Features

- ✓ Directional pattern and high gain
- ✓ Wide operating temperature range
- ✓ Designed to NASA GEVS (GSFC-STD-7000)
- ✓ TRL 9

Benefits

- ✓ Commercial off-the-shelf (COTS)
- ✓ Acceptance Tests available
- ✓ Compatible Test Hat available
- ✓ Qualified for space applications
- ✓ True circular polarization with extremely low Axial Ratio over the entire frequency band
- ✓ Consultation services available (link budget, architecture and system design)

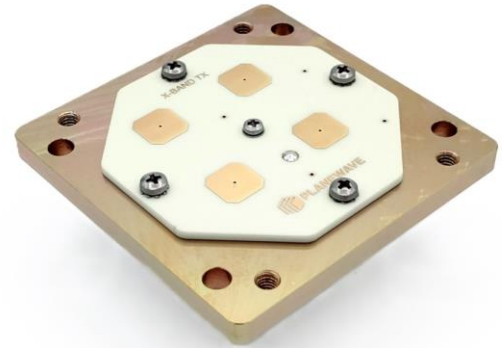

Product Overview

PW8282-101 is a high-performance antenna designed for high throughput downlink applications in harsh space environments. It features excellent axial ratio over the entire frequency band, making it ideal for demanding and reliable space communication links.

This antenna is a perfect choice for a variety of space applications, including LEO, MEO and GEO. The X-Band Antenna is lightweight and easy to integrate. It is also available with Test Hats to facilitate testing and integration.

Related Products

Part Number	Description
PW8282-301	X-Band RHCP TX 2X2 Test Hat
PW2222-101	S-Band RHCP TX 2x2 Antenna
PW2222-301	S-Band RHCP TX 2x2 Test Hat
PW2020-000	Active S-Band RHCP RX Omni Antenna
PW2020-110	S-Band Dual-CP RX Omni Antenna
PW1515-001	Active GPS L1 Antenna

Information furnished by PlaneWave, Inc. is believed to be accurate and reliable. However, no responsibility is assumed by PlaneWave for its use, nor for any infringements of patents or other rights of third parties that may result from its use.

Electrical Specifications

Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	8025		8400	MHz
Polarization		RHCP		
Axial Ratio		2	3	dB
VSWR			2:1	
Gain	9	10	11	dBic
Pattern Coverage		Directional		
Power Handling	20			W


Mechanical Specifications







Parameter / Condition	Value	Unit	Limits
Connector	SMA Female		
Mass	70	g	Max
Compatible Test Hat	PW8282-301		

Environmental Specifications


Parameter / Condition	Min	Typ	Max	Unit
Operating Temperature	-70		100	°C
Storage Temperature	-70		100	°C
Vibration	14.1			G _{RMS}

Random Vibration Test Levels
(GSFC-STD-7000)

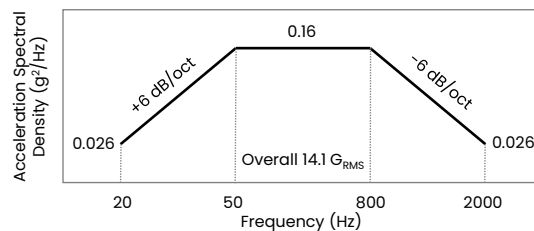

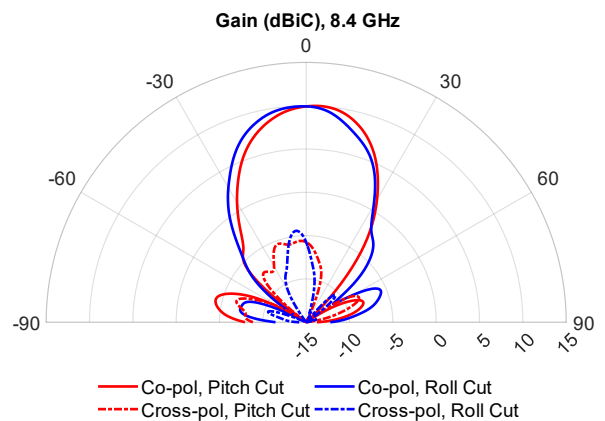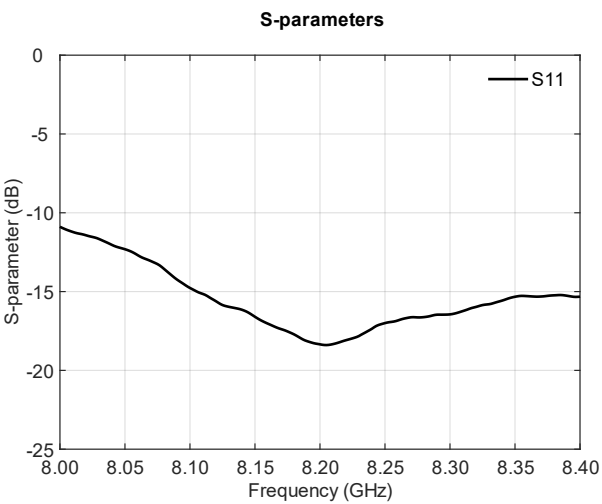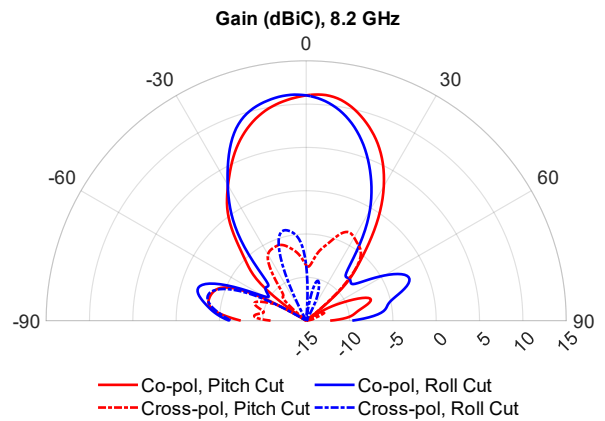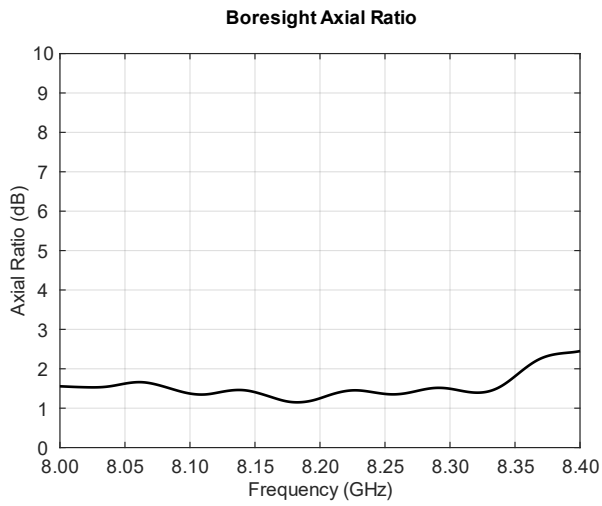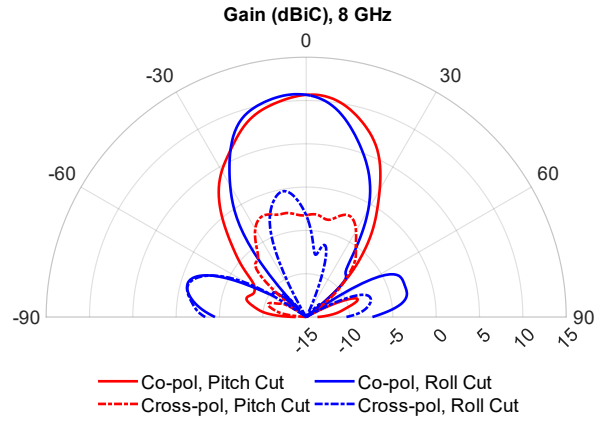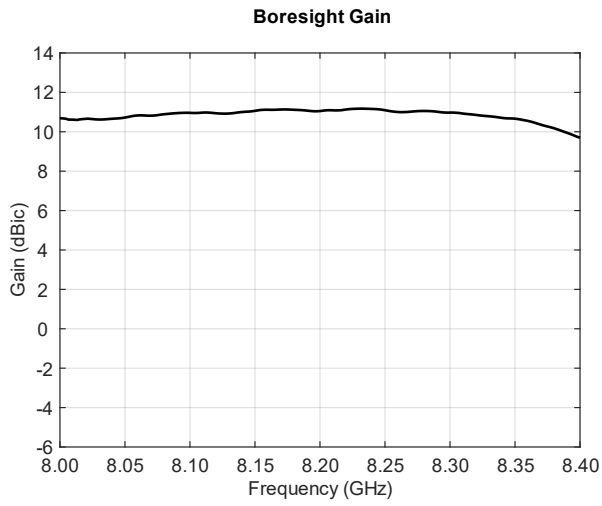

Mechanical Outline

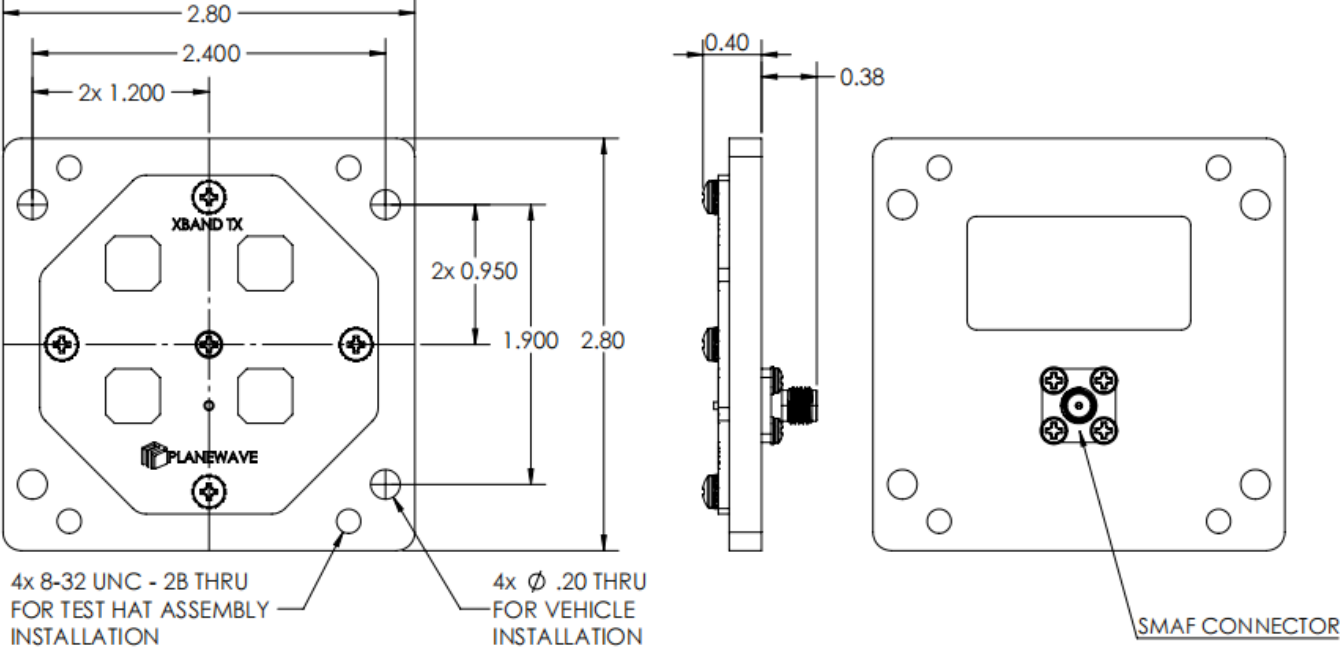

Dimensions shown in inches.
Tolerances - Two Place Decimal: ±0.010, Three Place Decimal: ±0.005

Contact PlaneWave, Inc.

6925 Canby Ave, Ste 110
Reseda, CA 91335

www.planewaveinc.com
sales@planewaveinc.com