
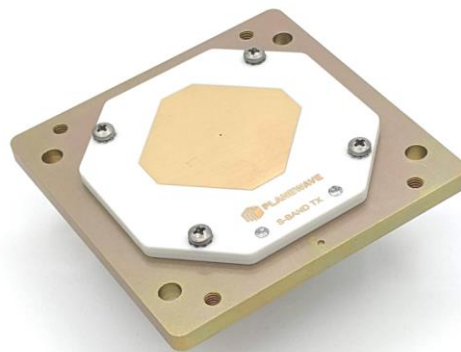


Space-Rated Product Catalog

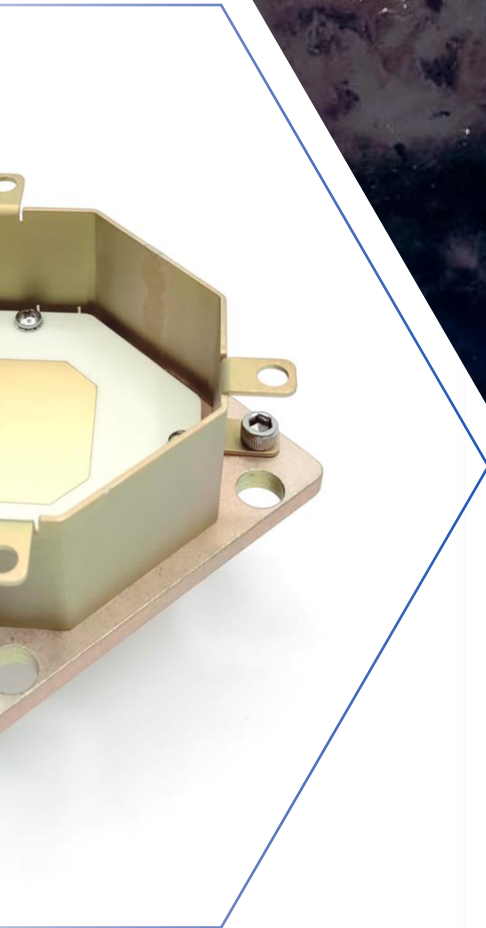

Information furnished by PlaneWave, Inc. is believed to be accurate and reliable. However, no responsibility is assumed by PlaneWave for its use, nor for any infringements of patents or other rights of third parties that may result from its use.

PlaneWave is a dependable provider of antenna/RF product development and manufacturing services. PlaneWave specializes in designing and manufacturing cutting-edge wireless communication, navigation and sensing front-end hardware and subsystems for clients in a wide range of industries. The application of its products include but are not limited to fast moving platforms such as aviation and space vehicles, as well as transportation and agriculture sectors.

INDUSTRY LEADER IN
LONG-LIFE LEO
ANTENNA/RF DESIGN &
MANUFACTURING

1

PlaneWave's team of engineers and technicians have vast experience in product development, prototyping, testing, and mass production. The company uses latest technologies and equipment to ensure that its products are of the highest quality, are cost-effective and meet the industry standards. Clients can rely on PlaneWave's expertise and efficiency in providing full-cycle product development services, from concept to mass production.

PATENT-PENDING MULTI-
BAND SHARED APERTURE
ANTENNAS

2

CONCEPT TO DELIVERY
OF CUSTOM DESIGNS IN
UNDER 16 WEEKS

3

DEEP EXPERTISE IN
AVIATION AND SPACE
QUALIFICATION

4

PlaneWave aims to bring canonical engineering to a wide array of applications. Our team is comprised of seasoned players in the RF and digital fields with a bend towards efficient prototyping and iteration as well as a strong emphasis on designing with manufacturability and robustness. Whether the need be of the Navigation, Communications, IoT, or specialized RF hardware, front-end or Antenna design variety, PlaneWave is ready to meet your needs.

Contact PlaneWave, Inc.

6925 Canby Ave, Ste 110
Reseda, CA 91335

www.planewaveinc.com
sales@planewaveinc.com

Application	Title	Part Number	Page
S-Band TT&C	Active S-Band RHCP RX Omni Antenna	PW2020-000	5
	S-Band LNA	PW2020-200	5
	S-Band Dual-CP RX Omni Antenna	PW2020-110	6
	S-Band Dual-CP RX Omni Test Hat	PW2020-310	6
	S-Band Dual-CP TX Omni Antenna	PW2222-110	6
	S-Band Dual-CP TX Omni Test Hat	PW2222-310	7
	S-Band RHCP TX 2x2 Antenna	PW2222-101	7
	S-Band RHCP TX 2x2 Test Hat	PW2222-301	7
	S-Band Dual-CP Wideband Omni Antenna	PW2022-111	8
	S-Band RHCP Dual-Port (TX+RX) Omni Antenna	PW2022-102	8
	Active S-Band RHCP Dual-Port (TX+RX) Omni Antenna	PW2022-002	9
	S-Band RHCP Dual-Port (TX+RX) Omni Test Hat	PW2022-302	9
	S-Band Dual-CP Wideband Omni Test Hat	PW2022-311	10
GPS & GNSS	Active GPS L1 Antenna	PW1515-001	11
	GPS L1 LNA	PW1515-201	11
	GPS L1 Test Hat	PW1515-301	12
	Active GPS L1/E1 Antenna	PW1515-004	12
	Active GNSS L1/E1/L2/L5/E5 Antenna	PW1115-002	13
	Active GNSS L1/E1/L2/L5/E5 Test Hat	PW1115-302	13
X-Band	X-Band RHCP TX 2x2 Antenna	PW8282-101	14
	X-Band RHCP TX 2x2 Test Hat	PW8282-301	14
	X-Band RHCP TX 4x4 Antenna	PW8282-104	14
	X-Band RHCP TX Switched-Beam Hemispherical Antenna Module	PW8282-103	15
	X-Band RHCP TX 2x2 Test Hat	PW8282-302	15
L-Band	L-Band RHCP Wideband Omni Antenna	PW1516-100	16
	L-Band RHCP Wideband Omni Test Hat	PW1516-300	16
UHF	UHF Linearly Polarized Antenna	PW0404-100	17
	UHF Linearly Polarized Test Hat	PW0404-300	17

Contact PlaneWave, Inc.

6925 Canby Ave, Ste 110
Reseda, CA 91335

www.planewaveinc.com
sales@planewaveinc.com




Application	Title	Part Number	Page
Broadband Horn	Dual-Ridged Horn Antenna, 18-40 GHz	PW4018-100	18
	Quad-Ridged Horn Antenna, 10-40 GHz	PW4010-101	18
	K-Ka-Band Dual-Port (RHCP+LHCP) Waveguide Probe	PW3017-100	18
	K-Ka-Band Dual-Port (RHCP+LHCP) Horn Antenna, 15 dB	PW3017-115	19
	K-Ka-Band Dual-Port (RHCP+LHCP) Horn Antenna, 20 dB	PW307-120	19
Accessories	L-S-Band Bias Tee	PW1040-400	20

Contact PlaneWave, Inc.

6925 Canby Ave, Ste 110
Reseda, CA 91335

www.planewaveinc.com
sales@planewaveinc.com



PW2020-000 Active S-Band RHCP RX Omni Antenna

Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	2025		2110	MHz
Polarization		RHCP		
Axial Ratio		2	3	dB
VSWR			2:1	
Passive Gain	4	4.5	5	dBic
Pattern Coverage		Omni		
LNA Gain (Notes 1 and 2)	26	28	32	dB
Noise Figure (Note 2)		2.2	3.5	dB
Rejection @ 2200 MHz	60			dBc
Voltage	4.5	5	12	V
Current		50	60	mA
Mass			140	g
Operating Temperature	-70		100	°C
Radiation Hardness (TID)	500			krad
Destructive Single Event Effects (Note 3)	37			MeV-cm ² /mg
Vibration	14.1			G _{RMS}

Note 1: LNA gain is customizable upon request

Note 2: Measured over the full operating temperature range

Note 3: No destructive SEE was observed when tested with heavy ions up to the above LET


PW2020-200 S-Band LNA


Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	2025		2110	MHz
VSWR			2:1	
Gain (Notes 1 and 2)	26	28	32	dB
Noise Figure (Note 2)		2.2	3.5	dB
Rejection @ 2200 MHz	60			dBc
Voltage	4.5	5	12	V
Current		50	60	mA
Mass			110	g
Operating Temperature	-70		100	°C
Radiation Hardness (TID)	500			krad
Destructive Single Event Effects (Note 1)	37			MeV-cm ² /mg
Vibration	14.1			G _{RMS}

Note 1: LNA gain is customizable upon request


Note 2: Measured over the full operating temperature range

Note 3: No destructive SEE was observed when tested with heavy ions up to the above LET




PW2020-110 S-Band Dual-CP RX Omni Antenna

Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	2025		2110	MHz
Polarization		RHCP/LHCP		
Axial Ratio		2	3	dB
VSWR			2:1	
Gain	4	4.5	5	dBic
Pattern Coverage		Omni		
Mass			100	g
Operating Temperature	-70		100	°C
Vibration	14.1			G _{RMS}

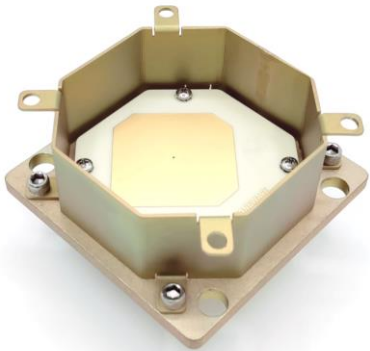


PW2020-310 S-Band Dual-CP RX Omni Test Hat

Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	2025		2110	MHz
Polarization		RHCP/LHCP		
VSWR			2.5:1	
Coupling	2.5	3.5	4.5	dB
Mass			130	g
Operating Temperature	-70		100	°C




PW2222-110 S-Band Dual-CP TX Omni Antenna


Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	2200		2290	MHz
Polarization		RHCP/LHCP		
Axial Ratio		2	3	dB
VSWR			2:1	
Gain	4	4.5	5	dBic
Pattern Coverage		Omni		
Power Handling	20			W
Mass			100	g
Operating Temperature	-70		100	°C
Vibration	14.1			G _{RMS}

**PW2222-310** S-Band Dual-CP TX Omni Test Hat


Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	2200		2290	MHz
Polarization		RHCP/LHCP		
VSWR			2.5:1	
Coupling	2.5	3.5	4.5	dB
Mass			130	g
Operating Temperature	-70		100	°C

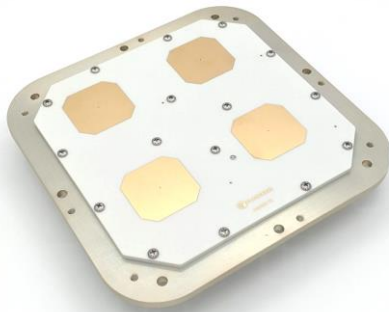**PW2222-101** S-Band RHCP TX 2x2 Antenna

Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	2200		2290	MHz
Polarization		RHCP		
Axial Ratio		2	3	dB
VSWR			2:1	
Gain	10	11	12	dBic
Pattern Coverage		Directional		
Power Handling	20			W
Mass			350	g
Operating Temperature	-70		100	°C
Vibration	14.1			G_{RMS}

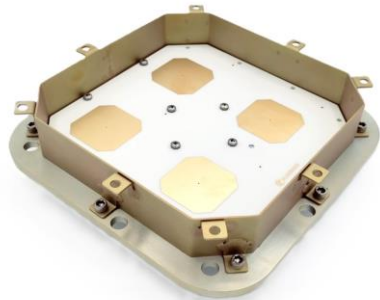
**PW2222-301** S-Band RHCP TX 2x2 Test Hat

Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	2200		2290	MHz
Polarization		RHCP		
VSWR			2:1	
Coupling	2.0	3.0	4.0	dB
Operating Temperature	-70		100	°C




PW2022-111 S-Band Dual-CP Wideband Omni Antenna

Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	2025		2290	MHz
Polarization		RHCP/LHCP		
Axial Ratio		2	3	dB
VSWR			2:1	
Gain	4	4.5	5	dBic
Pattern Coverage		Omni		
Power Handling	20			W
Mass			150	g
Operating Temperature	-70		100	°C
Humidity (MIL-STD-810 Method 507.6)	65%			
Vibration	14.1			G _{RMS}
LEO Mission Life	5			years

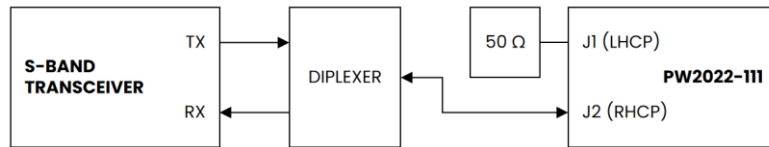



RHCP Link

PW2022-102 S-Band RHCP Dual-Port (TX+RX) Omni Antenna



Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency				
TX	2200		2290	MHz
RX	2025		2110	MHz
Polarization		RHCP		
Axial Ratio				
TX		2	4	dB
RX		2	4	dB
VSWR			2:1	
Port to Port Isolation	20			dB
Gain				
TX	3.5	4	4.5	dBic
RX	4	4.5	5	dBic
Pattern Coverage		Omni		
Power Handling	20			W
Mass			150	g
Operating Temperature	-70		100	°C
Humidity (MIL-STD-810 Method 507.6)	65%			
Vibration	14.1			G _{RMS}
LEO Mission Life	5			years

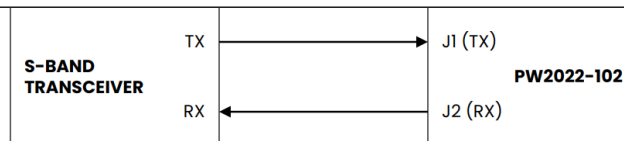



PW2022-002 Active S-Band RHCP Dual-Port (TX+RX) Omni Antenna

Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency				
TX	2200		2290	MHz
RX	2025		2110	MHz
Polarization		RHCP		
Axial Ratio				
TX		2	4.5	dB
RX		2	3	dB
VSWR			1.8:1	
TX to RX Isolation	25			dB
Passive Gain				
TX	1.5	2.5	3	dBic
RX	4.5	4.5	5.2	dBic
LNA Gain (Notes 1 and 2)	13	15	17	dB
Noise Figure (Note 2)		2.2	3.5	dB
Voltage	4.5	5	12	V
Current		30	40	mA
Pattern Coverage		Omni		
TX Power Handling	20			W
Mass			140	g
LEO Mission Life	5			years
Operating Temperature	-70		100	°C
Humidity (MIL-STD-810 Method 507.6)	65%			
Radiation Hardness (TID)	1			Mrad
Destructive Single Event Effects (Note 3)	37			MeV-cm ² /mg
Vibration	14.1			G _{RMS}


Note 1: LNA gain is customizable upon request

Note 2: Measured over the full operating temperature range

Note 3: No destructive SEE was observed when tested with heavy ions up to the above LET


PW2022-302 S-Band RHCP Dual-Port (TX+RX) Omni Test Hat


Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency				
TX	2200		2290	MHz
RX	2025		2110	MHz
Polarization		RHCP		
VSWR			2.5:1	
Coupling				
TX	-7	-5	-4	dB
RX	-5	-3	-2	dB
Mass			230	g
Operating Temperature	-70		100	°C



PW2022-311 S-Band Dual-CP Wideband Omni Test Hat

Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	2025		2290	MHz
Polarization		RHCP/LHCP		
VSWR			2.5:1	
Coupling	1	3	4	dB
Mass			250	g
Operating Temperature	-70		100	°C

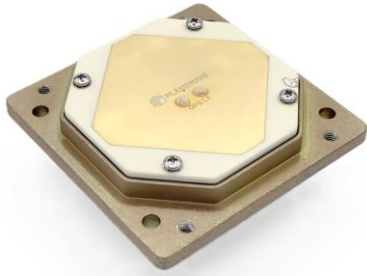

PW1515-001 Active GPS LI Antenna

Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	1563		1588	MHz
Polarization		RHCP		
Axial Ratio		2	3	dB
VSWR			2:1	
Passive Gain	4.5	5	5.5	dBic
Pattern Coverage		Omni		
LNA Gain (Notes 1 and 2)	12	15	18	dB
Noise Figure (Note 2)		2.5	3.5	dB
Rejection @ 1650 MHz	50			dBc
Voltage	4.5	5	12	V
Current		25	30	mA
Mass			130	g
Operating Temperature	-70		100	°C
Radiation Hardness (TID)	500			krad
Destructive Single Event Effects (Note 3)	37			MeV-cm ² /mg
Vibration	14.1			G _{RMS}

Note 1: LNA gain is customizable upon request

Note 2: Measured over the full operating temperature range

Note 3: No destructive SEE was observed when tested with heavy ions up to the above LET

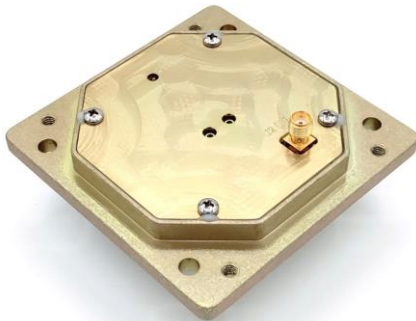
PW1515-201 GPS LI LNA


Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	1563		1588	MHz
VSWR			2:1	
Gain (Notes 1 and 2)	12	15	18	dB
Noise Figure (Note 2)		2.2	3.5	dB
Rejection @ 2200 MHz	60			dBc
Voltage	4.5	5	12	V
Current		25	30	mA
Mass			110	g
Operating Temperature	-70		100	°C
Radiation Hardness (TID)	500			krad
Destructive Single Event Effects (Note 1)	37			MeV-cm ² /mg
Vibration	14.1			G _{RMS}


Note 1: LNA gain is customizable upon request

Note 2: Measured over the full operating temperature range

Note 3: No destructive SEE was observed when tested with heavy ions up to the above LET

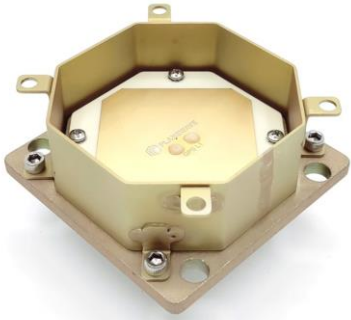**PW1515-301** GPS LI Test Hat

Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	1563		1588	MHz
Polarization		RHCP		
VSWR			2.5:1	
Coupling	3.5	4.5	6	dB
Mass			150	g
Operating Temperature	-70		100	°C


**PW1515-004** Active GNSS LI/EI Antenna

Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	1559		1592	MHz
Polarization		RHCP		
Axial Ratio		2	3	dB
VSWR			2:1	
Passive Gain	4.5	5	5.5	dBic
Pattern Coverage		Omni		
LNA Gain (Notes 1 and 2)	12	15	18	dB
Noise Figure (Note 2)		2.5	3.5	dB
Rejection @ 1650 MHz	50			dBc
Voltage	4.5	5	12	V
Current		25	30	mA
Mass			130	g
Operating Temperature	-70		100	°C
Humidity (MIL-STD-810 Method 507.6)	65%			
Radiation Hardness (TID)	3000			Krad
Destructive Single Event Effects (Note 3)	37			MeV-cm ² /mg
Vibration	14.1			G _{RMS}
LEO Mission Life	5			years

Note 1: LNA gain is customizable upon request

Note 2: Measured over the full operating temperature range

Note 3: No destructive SEE was observed when tested with heavy ions up to the above LET



PW1115-002 Active GNSS L1/E1/L2/L5/E5 Antenna

Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency				
	L5/E5/L2	1164	1240	MHz
L1/E1	1559	1591	MHz	
Polarization		RHCP		
Axial Ratio		2	3	dB
VSWR			2:1	
Passive Gain	2.5	3.5	4	dBic
Pattern Coverage		Omni		
LNA Gain (Notes 1 and 2)	12	15	18	dB
Noise Figure (Note 2)		2.5	3.5	dB
Rejection @ 1650 MHz	50			dBc
Voltage	4.5	5	12	V
Current		75	100	mA
Mass			140	g
LEO Mission Life	5			years
Operating Temperature	-70		100	°C
Humidity (MIL-STD-810 Method 507.6)	65%			
Radiation Hardness (TID)	3000			krad
Destructive Single Event Effects (Note 3)	37			MeV-cm ² /mg
Vibration	14.1			G _{RMS}


Note 1: LNA gain is customizable upon request

Note 2: Measured over the full operating temperature range

Note 3: No destructive SEE was observed when tested with heavy ions up to the above LET

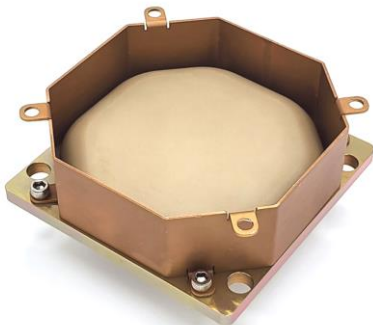

PW1115-302 GNSS L1/E1/L2/L5/E5 Test Hat

Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency				
	L5/E5/L2	1164	1240	MHz
L1/E1	1559	1591	MHz	
Polarization		RHCP		
VSWR			2.5:1	
Coupling				
	L5/E5/L2	-5	-3	-2
L1/E1	-8	-7	-5	dB
Mass			250	g
Operating Temperature	-70		100	°C

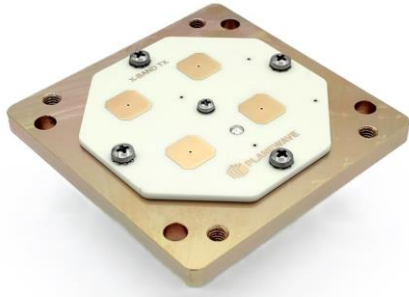

PW8282-101 X-Band RHCP TX 2x2 Antenna

Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	8025		8400	MHz
Polarization		RHCP		
Axial Ratio		2	3	dB
VSWR			2:1	
Gain	9	10	11	dBic
Pattern Coverage		Directional		
Power Handling	20			W
Mass			70	g
Operating Temperature	-70		100	°C
Vibration	14.1			G _{RMS}

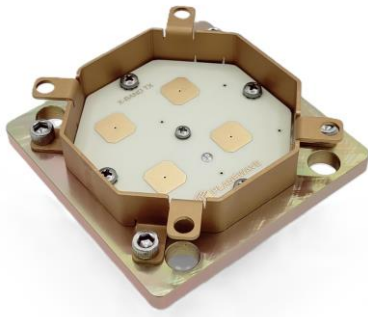

PW8282-301 X-Band RHCP TX 2x2 Test Hat

Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	8025		8400	MHz
Polarization		RHCP		
VSWR			2:1	
Coupling	4	5	7	dB
Mass			130	g
Operating Temperature	-70		100	°C



PW8282-104 X-Band RHCP TX 4x4 Antenna

Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	8025		8500	MHz
Polarization		RHCP		
Axial Ratio		2	3	dB
VSWR			2:1	
Gain	15	16	17	dBic
Pattern Coverage		Directional		
Power Handling	20			W
Operating Temperature	-70		100	°C
Vibration	14.1			G _{RMS}



PW8282-103 X-Band RHCP TX Switched-Beam Hemispherical Antenna Module




Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	8025		8500	MHz
Polarization		RHCP		
Axial Ratio		2	3	dB
VSWR			2:1	
Gain	8	9	10	dBic
Pattern Coverage	Directional, Switched Beam			
Power Handling	20			W
Mass			950	g
Operating Temperature	-70		100	°C
Humidity (MIL-STD-810 Method 507.6)	65%			
Vibration	14.1			G _{RMS}

PW8282-302 X-Band RHCP TX 2x2 Test Hat




Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	8025		8500	MHz
Polarization		RHCP		
VSWR			2.5:1	
Coupling	4	5	7	dB
Mass			160	g
Operating Temperature	-70		100	°C




PW1516-100 L-Band RHCP Wideband Omni Antenna

Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	1513		1675	MHz
Polarization		RHCP		
Axial Ratio		2	3	dB
VSWR			2:1	
Gain	4	4.5	5	dBic
Pattern Coverage		Omni		
Power Handling	20			W
Mass			200	g
Operating Temperature	-70		100	°C
Humidity (MIL-STD-810 Method 507.6)	65%			
Vibration	14.1			G_{RMS}
LEO Mission Life	5			years

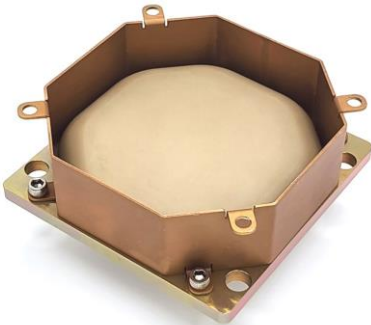

PW1516-300 L-Band RHCP Wideband Omni Test Hat

Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	1513		1675	MHz
Polarization		RHCP		
VSWR			2.5:1	
Coupling	2.5	3.5	4.5	dB
Mass			150	g
Operating Temperature	-70		100	°C

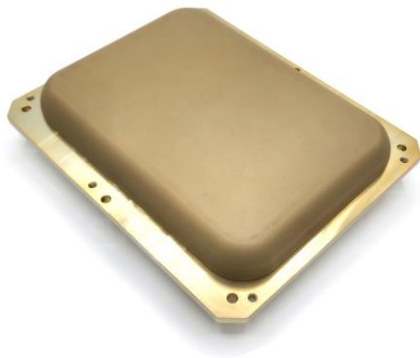

PW0404-100 UHF Linearly Polarized Antenna


Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	395		405	MHz
Polarization		Linear		
VSWR		2:1	3.6:1	
Gain	-1	0.5	1	dBi
Pattern Coverage		Omni		
Power Handling	20			W
Mass			630	g
Operating Temperature	-70		100	°C
Humidity (MIL-STD-810 Method 507.6)	65%			
Vibration	14.1			G _{RMS}
LEO Mission Life	5			years

PW0404-300 UHF Linearly Polarized Test Hat

Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency (RX)	395		405	MHz
Polarization		Linear		
VSWR		2:1	3.6:1	
Coupling	-10	-4	-3	dB
Mass			720	g
Operating Temperature	-70		100	°C



PW1040-400 L-S-Band Bias Tee



Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	1000		4000	MHz
VSWR			2:1	
Insertion Loss	0.2	0.3	0.4	dB
DC to RF Isolation	30			dB
Voltage			50	V
Current			500	mA
Mass			80	g
Operating Temperature	-70		100	°C
Vibration	14.1			G _{RMS}
LEO Mission Life	5			years



PW4018-100 Dual-Ridged Horn Antenna, 18-40 GHz

Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	18		40	GHz
Polarization		Linear		
VSWR			2:1	
Gain	8		12	dBi
Power Handling (CW)			10	W
Operating Temperature	-40		85	°C
Mass			25	g
Vibration	14.1			G _{RMS}
Connector			2.92 mm Female	



PW4010-101 Quad-Ridged Horn Antenna, 10-40 GHz


Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	10		40	GHz
Polarization		Dual-Linear		
VSWR			2:1	
Gain	3		11	dBi
Power Handling (CW)			10	W
Operating Temperature	-40		85	°C
Mass			45	g
Vibration	14.1			G _{RMS}
Connector			2.92 mm Female	



PW3017-100 K-Ka-Band Dual-Port (RHCP+LHCP) Waveguide Probe


Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	17		30	GHz
Polarization		RHCP/LHCP		
VSWR			2:1	
Gain	6		10	dBi
Power Handling (CW)			20	W
Operating Temperature	-40		85	°C
Mass			60	g
Vibration	14.1			G _{RMS}
Connector			2.92 mm Female	

PW3017-115 K-Ka-Band Dual-Port (RHCP+LHCP) Horn Antenna, 15 dB

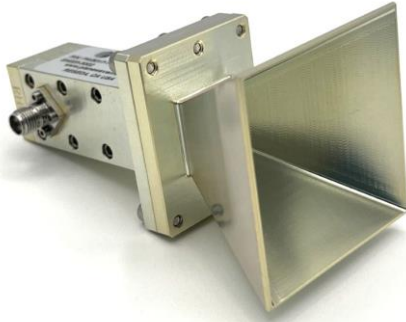

Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	17		30	GHz
Polarization		RHCP/LHCP		
VSWR			2:1	
Gain	15		18	dBi
Power Handling (CW)			10	W
Operating Temperature	-40		85	°C
Mass			100	g
Vibration	14.1			G _{RMS}
Connector		2.92 mm Female		

PW3017-120 K-Ka-Band Dual-Port (RHCP+LHCP) Horn Antenna, 20 dB

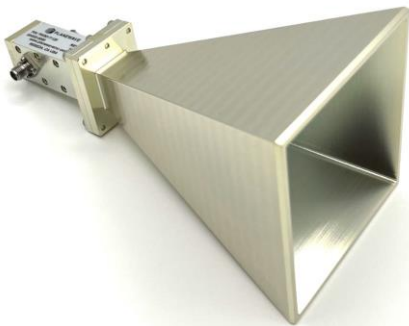

Parameter / Condition	Min	Typ	Max	Unit
Operating Frequency	17		30	GHz
Polarization		RHCP/LHCP		
VSWR			2:1	
Gain	19	20	21	dBi
Power Handling (CW)			10	W
Operating Temperature	-40		85	°C
Mass	150			g
Vibration	14.1			G _{RMS}
Connector		2.92 mm Female		

Contact PlaneWave, Inc.

6925 Canby Ave, Ste 110
Reseda, CA 91335

www.planewaveinc.com
sales@planewaveinc.com